



Westcountry Rivers Trust

Slowing the flow in the Budleigh Brook Catchment

CROC - CLIMATE RESILIENT OTTER CATCHMENT

Invitation to Tender for the Provision of:

In-stream NFM RSPB Aylesbeare Common

Sept-Dec 2026

To be supplied to Westcountry Rivers Trust



Date of Document: 17th June 2026

Prepared by: Milly Bowden

Authorised by: Annabel Martin



Contents

1. Project Officer	
2. Introduction & Overview	
3. Scope of the Service.....	1
A) Site Location	1
B) Site Information.....	3
C) Services Required	3
D) Timescale	4
E) Special site considerations	4
4. ITT Responses.....	5
A) Respondent Guidelines.....	5
B) Tender Assessments: Evaluation and Process.....	6
C) Confidentiality	6
D) Finance.....	6
E) ITT Acceptance	6
5. For Reference.....	8
Appendix A: Concept Plan.....	8
Appendix B: Site photos.....	14

1. Project Officer

For all enquiries and submissions concerning this Invitation to Tender, please contact:

Milly Bowden & Yog Watkins

Senior Farm Advisors

Westcountry Rivers Trust, Rain-Charms House, Kyl Cober Parc, Stoke Climsland, Callington, Cornwall, PL17 8PH

E: millybowden@wrt.org.uk M: 07930 371207

E: yog@wrt.org.uk M: 07854 145896

All enquiries for further information will be answered to all parties.

2. Introduction & Overview

Client: Westcountry Rivers Trust

Principal Designer: Westcountry Rivers Trust

Principal Contractor: TBC

A. Company Background

Westcountry Rivers Trust (WRT) is an environmental charity (Charity No. 1135007, Company No. 06545646) established in 1994 to secure the preservation, protection, development and improvement of the rivers, streams, watercourses, and water impoundments in the West Country, and to advance the education of the public in the management of water and associated habitats.

B. Project Background


The 237km² River Otter catchment rises in the Blackdown Hills and meets the sea at Budleigh Salterton. 103 residential properties flooded in the catchment in May 2023 due to intense rainfall creating significant runoff from agricultural land and protected sites, further runoff has been noted during Storm Ciaran.



The Section 19 Report following the May 2023 flooding makes specific recommendations around the need to deliver NFM upstream of impacted communities, and to better understand and improve land management practices. The 'Climate Resilient Otter Catchment' CROC project focuses advice and funding on both land management and NFM.

3. Scope of the Service


A) Site Location

For- Aylesbeare Common - RSPB on behalf of the EA CROC project
As shown below, the site is located to the west of Newton Poppleford.

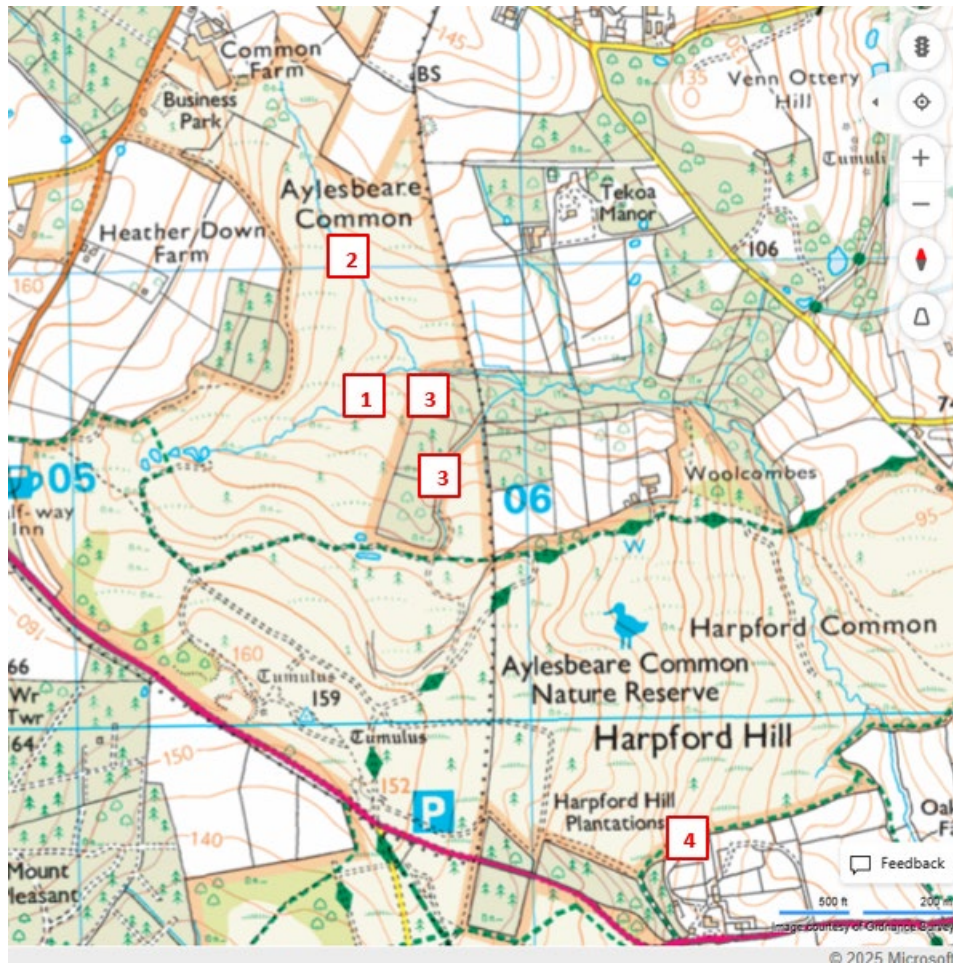

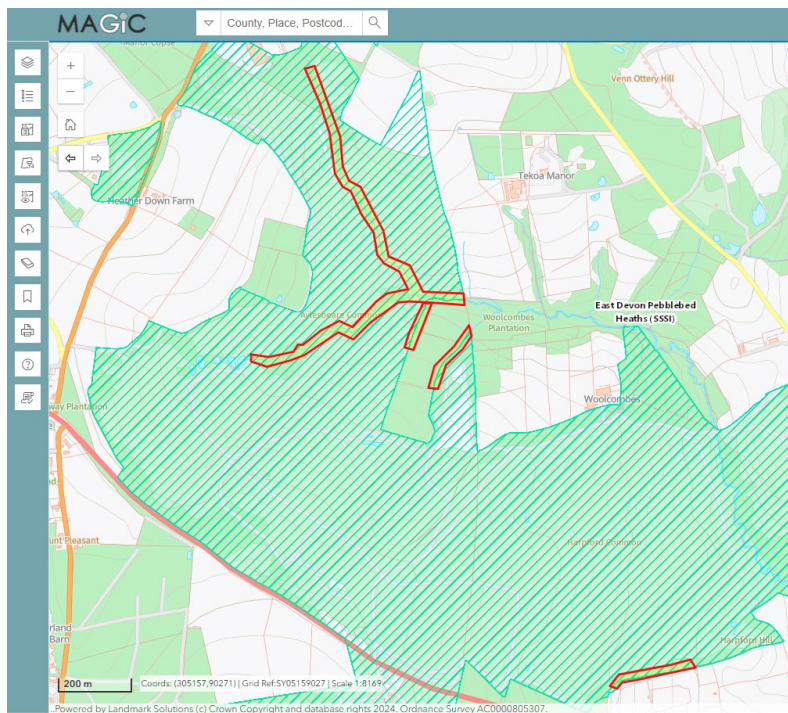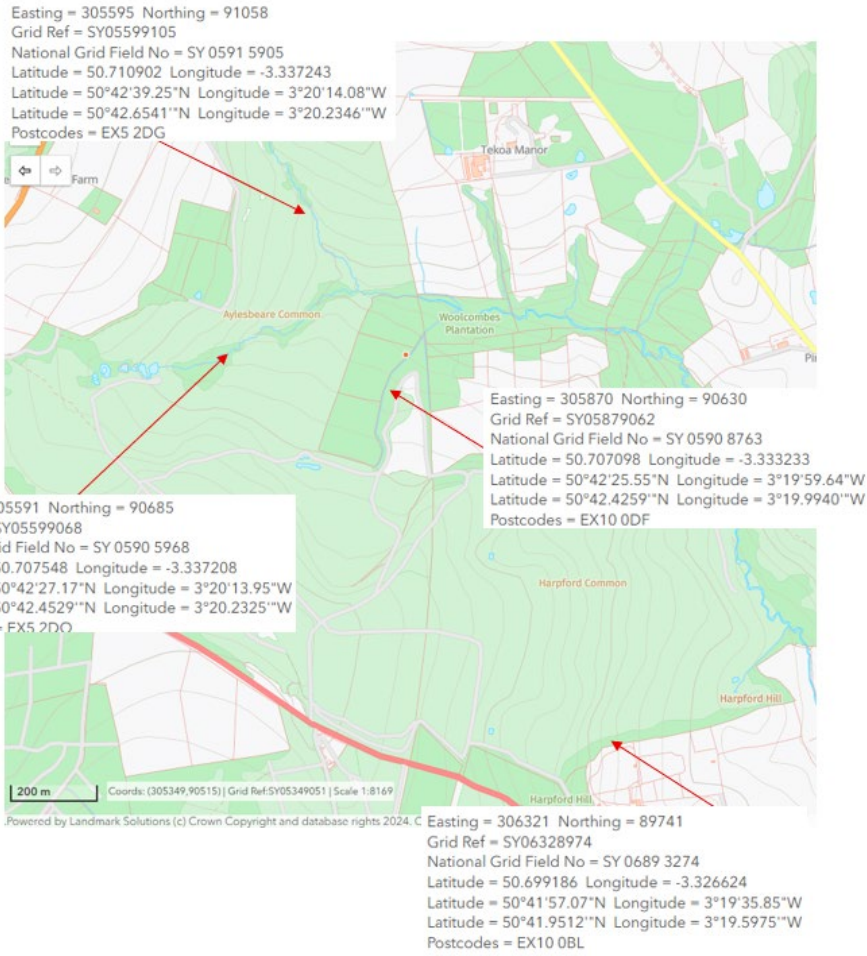

This tender only concerns the leaky dams and flow spreaders in the map below:

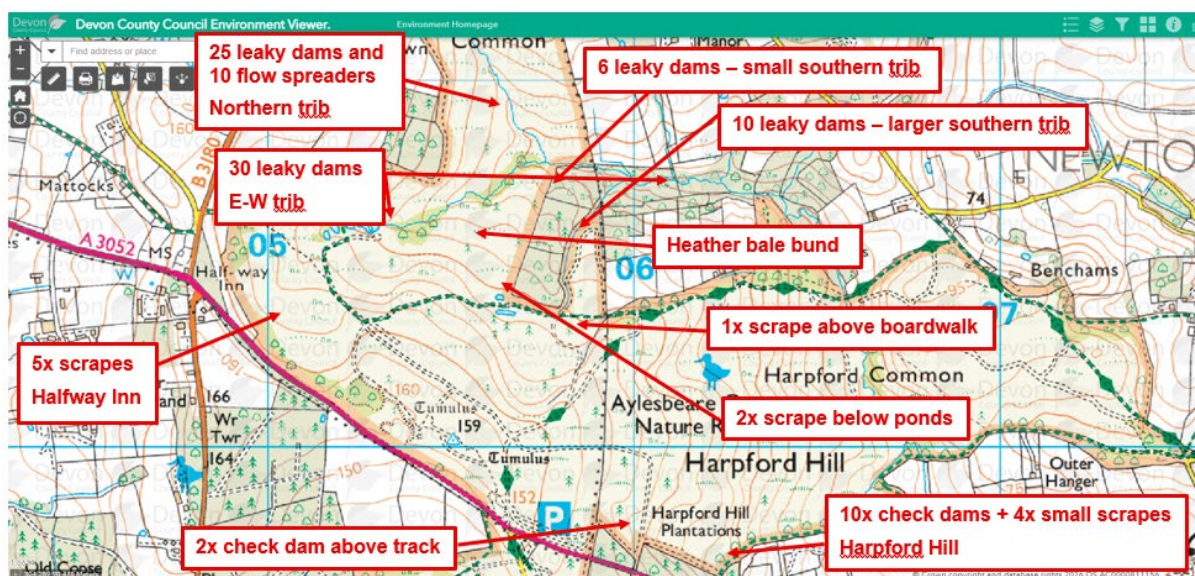

You are welcome to visit the site by arrangement however, it is a large area and not all locations can be guided. Please let the Project Officer know if you intend to visit the site to prepare your tender response. A member of WRT staff will organise permission and may accompany you to the site.

B) Site Information

- Aylesbeare Common is located in East Devon within the East Devon Pebblebed Heaths, owned by Clinton Devon Estates and managed by the RSPB. The common is a SSSI.
- The site has public access and conservation grazing.
- There are no known water supplies (underground) and electricity (overhead) but site checks should be undertaken at each location by the contractor.

C) Services Required

- Site 1: A cascade of **30 leaky woody dams** will be placed in the Back Brook flowing below Five Ponds
- Site 2: **25 leaky dams** in the northern tributary. **10 Flow spreaders** will be placed on overland flow pathways to supplement these in channel dams.
- Site 3: **2 goyles** to the south of the Back brook channel will have **6 and 10 leaky dams respectively**. These channels are eroding and ephemeral.
- Site 4: In a large goyle to the south of Harpford Common/Harpford Hill **10 woody check dams** will be placed in the channel to slow the ephemeral flow of water and retain some eroding material.
- An option of Ground Investigations according to the Consultant's assessment and agreement with the Client as to whether they are needed.

- i. *Appropriate risk assessments will be required for all elements of the services. Under CDM 2015 this includes a Designers Risk Assessment (DRA).*
- ii. *Optioneering for the above outcomes is welcomed against your experience. WRT have provided a Concept Plan (Appendix A), based on technical input, however, WRT are not technical design experts, and while operating as Principal Designer under CDM regulations WRT expect the appointed designer to provide comment on feasibility, health and safety, and budget practicality of options based on your technical experience.*
- iii. *The consultant must ensure that all elements conform to all relevant British and European Standards.*
- iv. *A draft NEC4 Contract representative of the final version has been supplied. A final version will be provided at appointment, with opportunity to review before acceptance.*

D) Timescale

The tender process is anticipated to follow the timeline presented in the table below:

Date	Action
3rd July 2026	Invitation To Tender released.
14th July 2026	All queries to be submitted.
16th July 2026	All queries to be addressed and returned to all applicants.
20th July 2026	ITT Deadline for design quotes.
29th July 2026	Notification of intent to award tender
7th August 2026	Signed NEC4 contract awarded
1st September 2026	Start date for NFM Works
30th September 2026	Completion of main channel NFM Works
1st December 2026	Completion of all NFM Works

E) Special site considerations

SSSI consent for these works has not yet been granted by Natural England and works are dependent on that consent being approved.

Land Drainage Consent has not yet been granted by Devon County Council and works are dependent on that consent being approved.

Due to the protected status of the Pebblebed Heaths SSSI and National Landscape and certain habitats, no additional work, other than discussed here, should be undertaken without prior permission-once granted, the SSSI and LDC consents can be provided if requested.

In rivers that are sensitive to fish spawning, no in-stream work is permitted to be carried out between the dates of 1st October to 31st May (dates inclusive). The main channel of the site has

been assessed to have spawning habitat, care must be taken to avoid disturbance of silt and releasing silt into the watercourse.

Tributaries and goyle work can be carried out after the end of September.

Trees and ground areas with active birds' nests in MUST be avoided. Note birds may nest earlier or later than the official nesting season due to local conditions. This work can only commence after the 1st of September.

4. ITT Responses

A) Respondent Guidelines

You are required to submit a written proposal, either hard copy or electronically to the **Project Officer** by the deadline.

- i. All proposals should include the following:
 - Details of company experience in **Natural Flood Management delivery**
 - Costings: including breakdown of delivery items to allow for partial project invoices, against specified item costs, if required
 - An estimation of timescale and outline programme
 - Details of staff to be delivering the work including relevant experience (e.g. CV)
 - Completed draft NEC4 Contract supplied
 - Current insurance certificates for Employer Liability, Professional Indemnity and Public Liability.
 - Health & Safety information and RAMS
- ii. The draft NEC4 template provided requires you to fill out: The *Consultant's* insurance details, the *Consultant's* Contract Data, the *Consultant's* Offer, the Price List, and to sign the contract as a formal offer.
- iii. A detailed breakdown in the Price List of the NEC4 Contract allows for partial project invoices, against the specified item costs, if required.
- iv. You are expected to supply all required information or clearly state the reason for being unable to do so. Any return supplied must make it clear if any part of the Contractor's offer does not comply with the Contract Data or the Works Information provided.
- v. In submitting a quotation, you are stating you are suitably qualified and experienced in work of this nature. If your tender is successful and the contract awarded, you are required to provide:
 - Risk Assessments for any site visits planned and work undertaken.
 - Details of proposed sub-contractors and current insurances (if applicable)

- vi. Any assumptions used in preparing responses should be clearly stated. Any appropriate supporting documents e.g. programmes, plans, company brochures, organisation charts should be included with the tender submission.

B) Tender Assessments: Evaluation and Process

- i. A set of evaluation criteria has been prepared by WRT for the evaluation of every submission. Within each stage an initial evaluation will consider whether or not every requirement contained within the ITT has been fulfilled. The evaluation criteria will be based on price (40%) and quality (60%) with quality being assessed on ability to meet the requirements (25%), delivery/timescales (25%) and staffing arrangement (10%).
- ii. All operations must strictly comply with all relevant Health and Safety, legal requirements and British & European codes of Best Practice.
- iii. If you have any queries, please do not hesitate to contact WRT.

C) Confidentiality

- i. All information supplied by WRT in this tender to date, and any further information supplied during the tender process, is confidential and must not be shared with any other organisations unless WRT agree permission in writing. The confidentiality extends to all recipients of this information.
- ii. This competitive invitation to tender process has been performed anonymously. Prospective contractor / invitee details will not be shared with other contractors by WRT. Any sensitive information shared with WRT as part of your response shall remain so between WRT and the prospective contractor. All enquiries for further information will be summarised anonymously and answered to all parties.

D) Finance

- i. This project is financed under the Climate Resilient Otter Catchment - CROC.
- ii. Funding for this contract is sponsored by the Environment Agency.
- iii. Invoicing terms are detailed in the NEC4 contract.
- iv. When invoicing, the invoice must clearly state the awarded NEC4 contract.

E) ITT Acceptance


- v. To simplify exchange of information regarding this Invitation to Tender (ITT) please nominate one point of contact with relevant telephone number/s and email address.
- vi. Please direct any questions regarding this ITT content or process to the Westcountry Rivers Trust Project Officer. All questions should be submitted to the Project Officer named above.
- vii. Please make sure any questions are submitted in good time for answers to be collated and distributed. A deadline may be in place for any queries to facilitate the fair tendering process for all respondents but should be no later than 1 week prior to submission deadline.




- viii. Where there is a valid reason, WRT reserve the right not to accept your submission, or any other quotations received. WRT are not liable for any cost you may incur in the preparation of your quotation.
- ix. If you have any queries, please do not hesitate to contact WRT and we look forward to receiving your response.

5. For Reference


Appendix A: Concept Plan

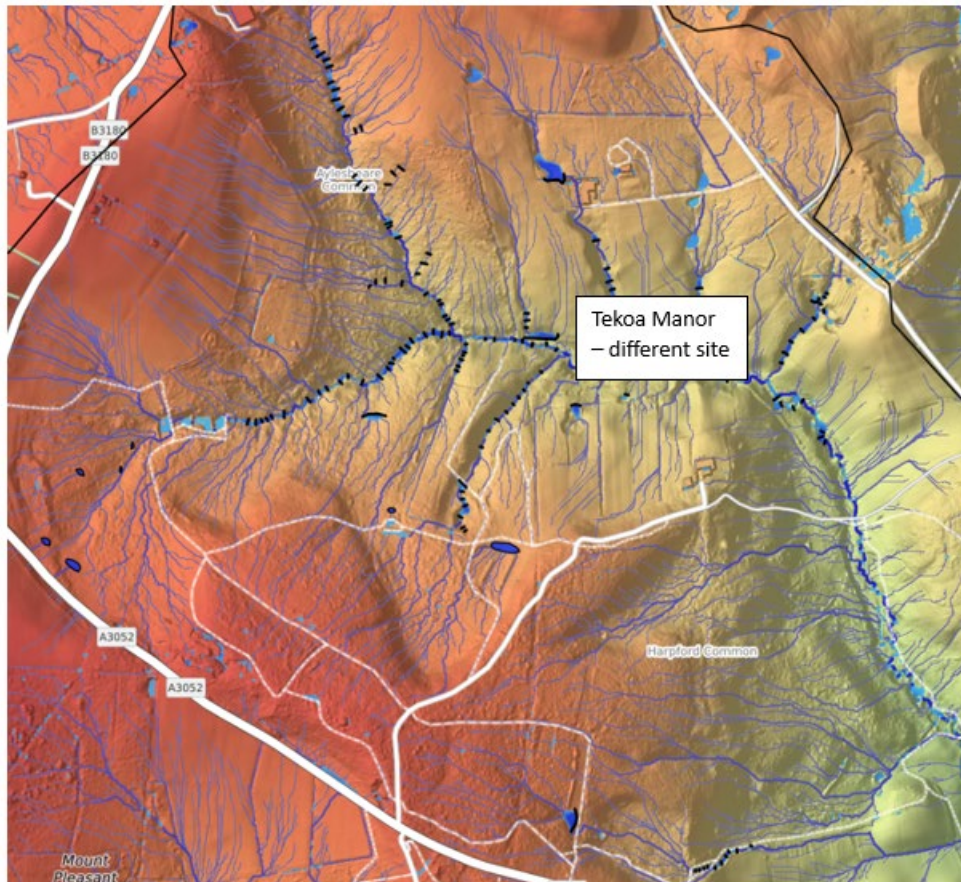


Site 1: 30 leaky dams

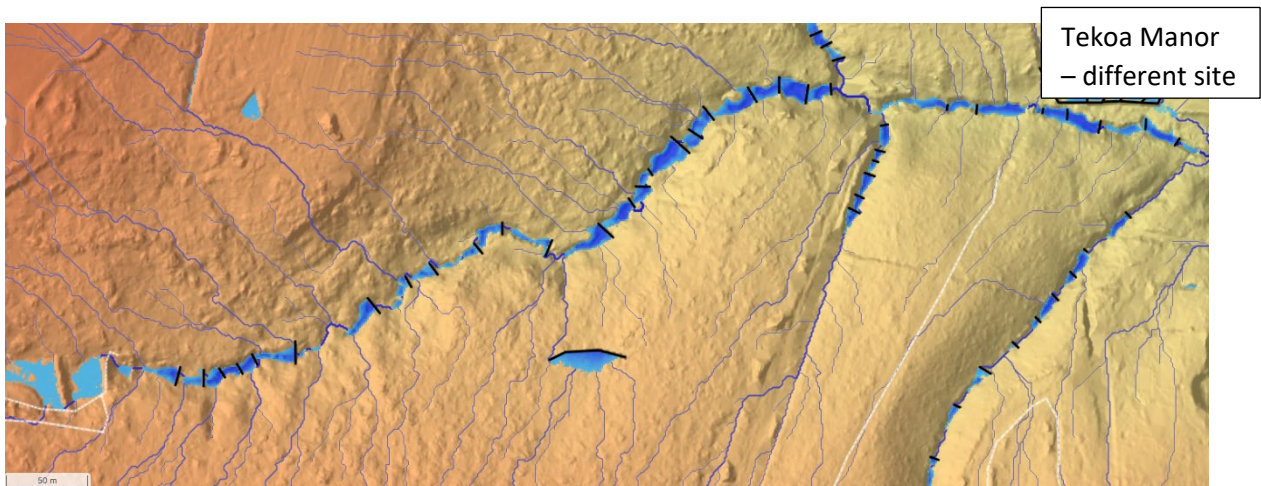


Site 2: 25 leaky dams and 10 flow spreaders

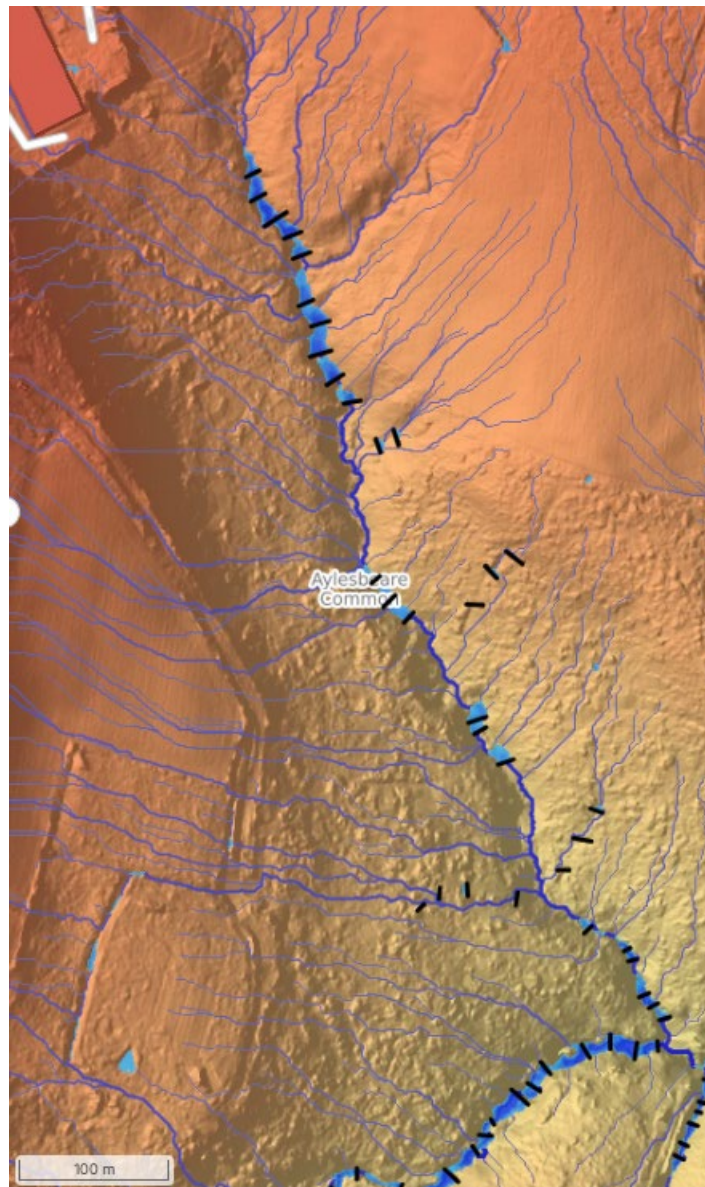

Site 3: Southern tribs 6 & 10 leaky dams

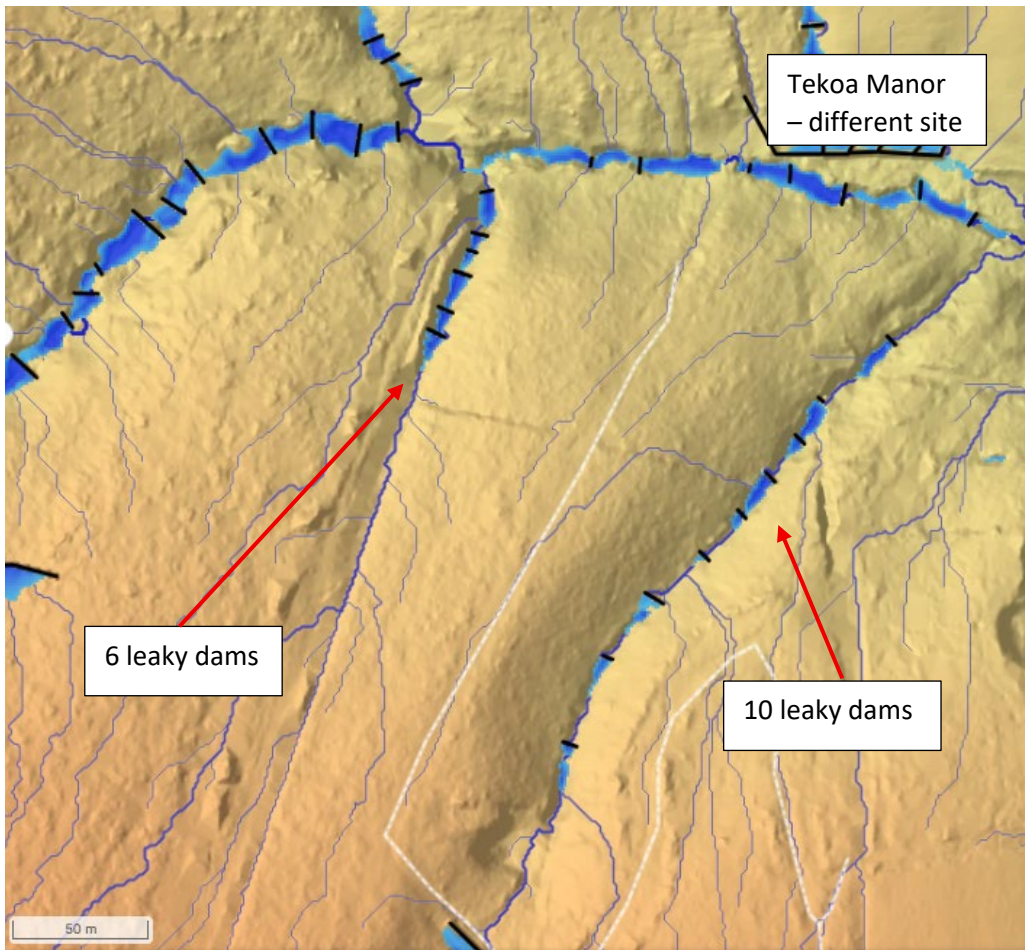

Site 4: Goyle 10 check dams

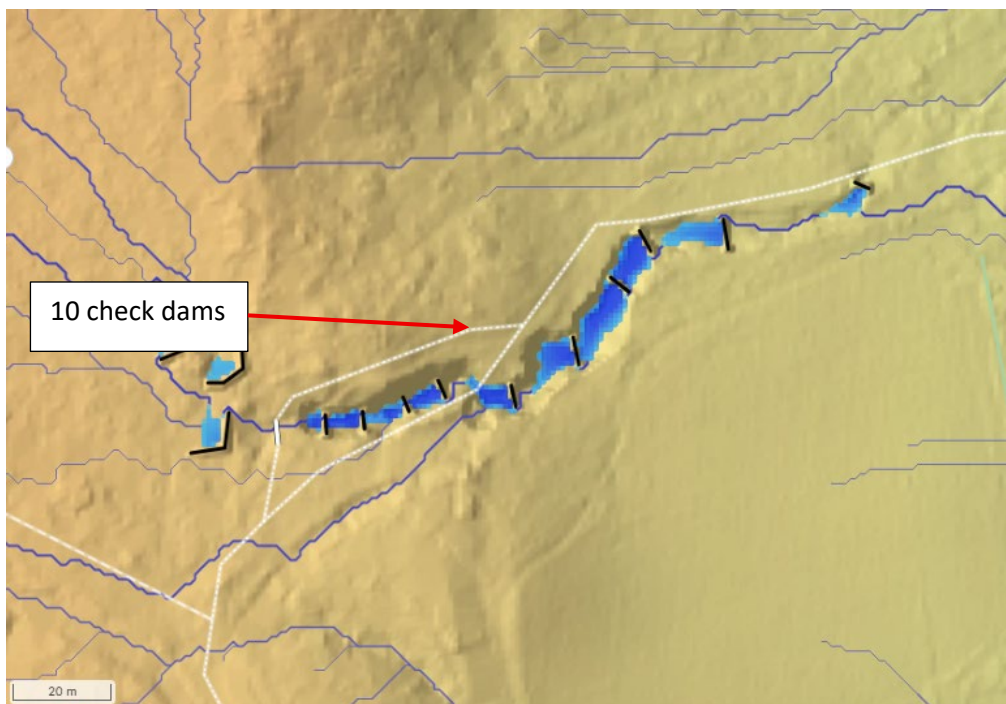


Flow spreaders and Leaky dams will slow the movement of water and will increase temporary storage of flood waters within water channels and out on to the floodplain, help delay the passage of flood water downstream, allow sediment to settle out and reduce downstream flood risk.

Check dams will restrict flow in the more incised channel in the mire with the aim to wet up the adjacent peat ground in higher flows.

Construction methods

Flow spreaders


Lie 20-30cm diameter and long branches and trunks flush or slightly below the soil surface to intercept overland flow. These can have small wooden stakes to stop movement forwards.

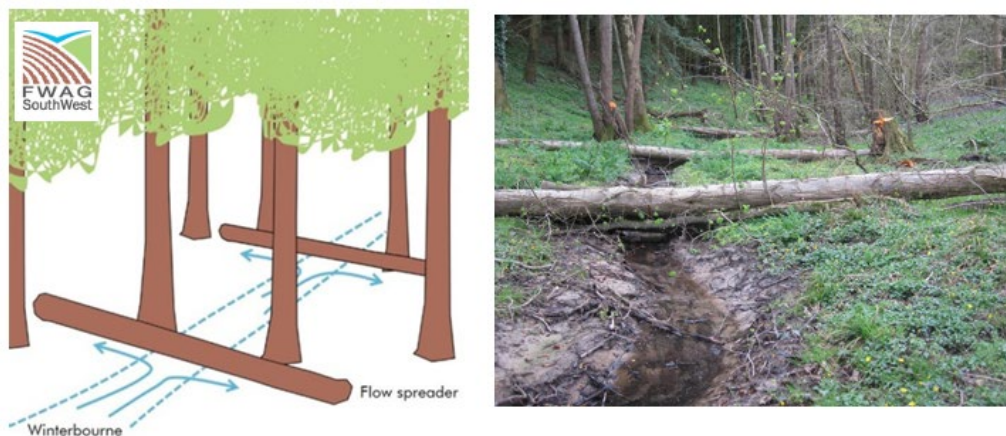

(Left) Woody flow spreader design and (right) an example of a flow spreader constructed under the Hills to Levels project.

Check Dams

A check dam tends to be placed in smaller narrower channels such as that on Bicton mire and is made of staked stacked logs or brash bundles cut into the sides of the channel to hold water and sediment back. Whilst it is leaky, it does not have unobstructed free-flow at the base as the purpose is to hold back sediment and be more of a restriction to water flow.

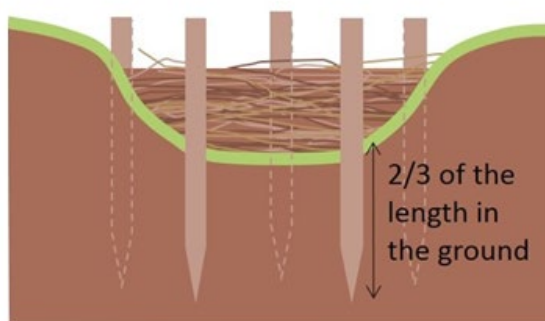

Brush bundles secured with wooden stakes.



Leaky barrier using hazel bundles

Leaky woody dams

The size, design and construction techniques for leaky dams are site specific. Works will be carried out by a trusted contractor. General design principles for woody log dams are as follows (this will be adapted for wool logs):

- Carefully selected trees along the watercourse will be felled to provide the materials for constructing the leaky dams. This material will likely need to be selected from adjacent Clinton Devon plantation woodlands.
- The leaky dam should be 2 times the width of the channel.
- Construct the dam from logs large enough to span the water channel and out on to the floodplain to provide a stable and long-lasting structure.
- Align dams at right angles to channel banks to reduce bank scour.
- Build dams to allow low flows and fish to always pass unimpeded at all times.
- Site dams on slow flowing reaches of the watercourse.
- Build dams to a height sufficient to encourage water to spread onto the floodplain upstream of the dam or hold water within the channel itself. Note it is not advised to build the dam higher than approximately 0.5 m.
- Chestnut stakes or steel pins can be used to secure the structure to the ground and to create a large mass of logs which is unlikely to move during high flows.
- Build dams in series (minimum 3 dams) at a spacing between dams of about 5-7 times the width of the channel.
- Make sure dams are not installed directly upstream of pinch points such as bridges or culverts that back up flows and are likely to swamp the dam. Dams should be no closer than 20m from culverts in offline ditches and at least 30m away in the river channel.


Appendix B: Site photos

Subject to SSSI and land drainage consent.

Site 1: Channel below 5 ponds



Site 1: Stream channel

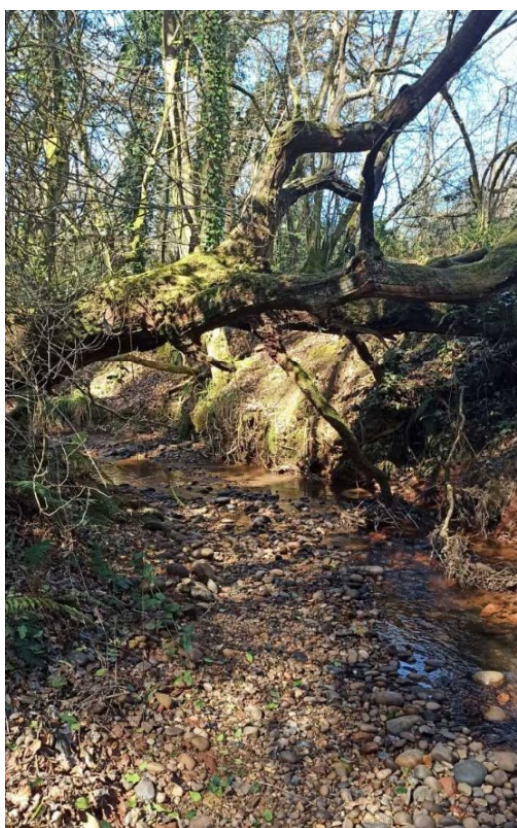

Site 1: Stream meander



Site 2: Trib on northern side of Back Brook



Site 3 channel, plantation woodland



Site 3: Goyle, woodland



Site 4: Goyle next to footpath



